


**TO/ FROM TABLE**

STAMP	Gauge	Col.	Length	Supplier part number	Strip 1	Term 1	From Connector	Pos.	Strip 2	Term 2	To Connector	Pos.	M/C
143	16	BRN	127	6TXL-1601-1	0.2	1060-16-0122	C1	4	5.6	12015869	C2	4	
144	16	RED	127	6TXL-1601-2	0.2	1060-16-0122	C1	10	5.6	12015869	C3	4	
145B	16	RED	127	6GXL-1601-2	0.2	1060-16-1222	SWITCHBOX2	2	5.6	12015870	C4	2	
145C	16	RED	127	6TXL-1601-2	0.2	1060-16-0122	C1	8	5.6	12015869	C3	2	
145D	16	RED	127	6TXL-1601-2	0.2	1060-16-0122	C1	11	5.6	12015869	C3	5	
145E	16	RED	127	6TXL-1601-2	0.2	1060-16-0122	C1	2	5.6	12015869	C2	2	
145F	16	RED	127	6TXL-1601-2	0.2	1060-16-0122	C1	5	5.6	12015869	C2	5	
151A	16	BRN	127	6TXL-1601-1	0.2	1060-16-0122	C1	1	5.6	12015869	C2	1	
151B	16	BRN	127	6TXL-1601-1	0.2	1060-16-0122	C1	3	5.6	12015869	C2	3	
151C	16	BRN	127	6TXL-1601-1	0.2	1060-16-0122	C1	7	5.6	12015869	C3	1	
151D	16	BRN	127	6TXL-1601-1	0.2	1060-16-0122	C1	9	5.6	12015869	C3	3	
199A	16	BRN	127	6GXL-1601-1	0.2	1060-16-1222	SWITCHBOX2	1	5.6		C4	3	
300B	16	GRN	127	6TXL-1601-D5	0.2	1060-16-0122	C1	6	5.6	12015869	C2	6	
301	16	VIO	127	6TXL-1601-7	0.2	1060-16-0122	C1	12	5.6	12015869	C3	6	

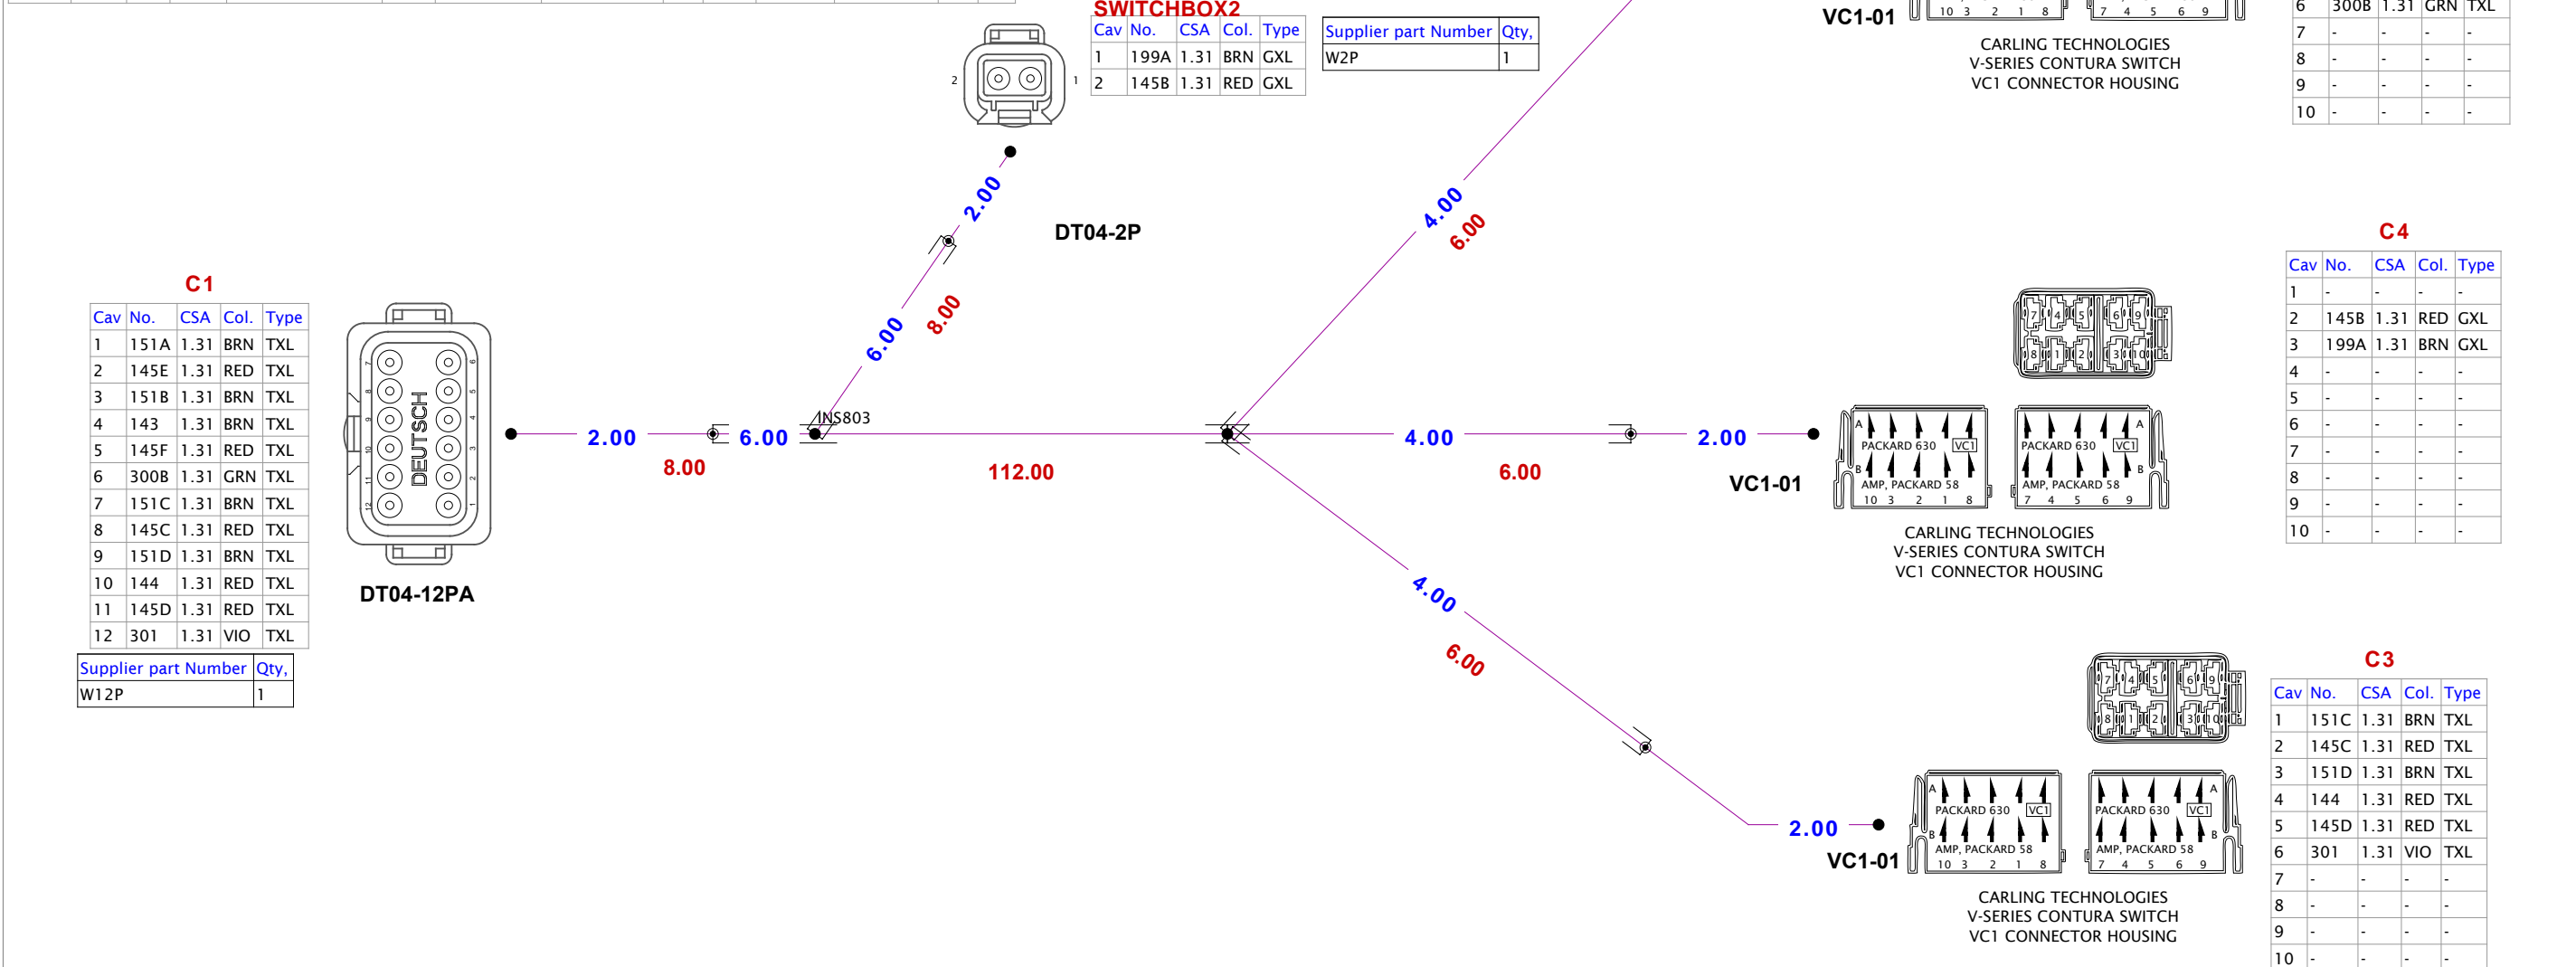

- NOTES:
- USE SAE J1128 GXL, TXL OR SXL WIRE
  - SECURE ALL BREAKOUTS AND JUNCTION WITH TAPE 3 WRAPS MINIMUM
  - LABEL HARNESS WITH THE MANUFACTURER IDENTIFICATION, BUILD DATE AND PART NUMBER.
  - USE PANDUIT LABEL LJS2-Y3-5 OR EQUIVLENT
  - ALL HARNESS WILL BE BRAIDED UNLESS OTHER WISE NOTE ON DRAWINGS.
  - SOLID LINES DENOTE BRAIDING
  - DASH LINE DENOTE NO BRAID
  - INSTALL CAVITY PLUGS ON ALL OPEN CAVITYS IF AVAILABLE.
  - INKJET OR HOT STAMP WIRES EVERY 2 INCHES
  - ALL SPLICES TO BE ULTRASONIC WELDED UNLESS OTHER WISE STATED ON DRAWING.
  - ALL WIRES LARGER THEN 10AWG SHOULD BE SPOT SOLDERED OR DIPPED.
  - ANY DEVIATION MUST BE SUBMITTED BY AND APPROVED BY EMAIL.
  - DIMENSION ARE IN INCHES
  - WIRE DIMENSIONS ARE TO WIRE ENDS. HARNESS DIMENSIONS ARE TO END OF COVERING. BETWEEN BREAKOUT CENTERS, AND TO SIDE OF COVERING FOR BREAKOUT LENGTHS.
  - SEE WIRE LIST FOR CIRCUIT DETAILS.

DATE	REVISION	DESCRIPTION OF CHANGE
11/11/14	B	ADDED C4, SWITCHBOX 2
4/2/15	C	MOVED WIRE 199A ON C4 FROM CAVITY 1 TO CAVITY 3

TOLERANCES UNLESS OTHERWISE SPECIFIED FOR HARNESSES & AND WIRE ASSEMBLIES

DIM.	TOL.
≤5 ft.	+/- .50in
>5 ft. to 10 ft.	+/- 1.0in
>10 ft. to 25 ft.	+/- 2.0in
>25 ft.	+/- 3.0in

FOR OTHER DEVICES  
 LINEAR DIM. +.060  
 HOLE POS. +.030  
 HOLE SIZE +.010

Owner  
**McLaughlin Group**  
 Title  
**Boom Switch Box Hrns**  
 Drawing #  
**X200132**  
 1 OF 1 CPE  
 PAGE Drawn By

This Drawing and its contents contain confidential and proprietary information of its owner and should not be used or disclosed as authorized by owner.